

HIGH VOLTAGE BUSBAR INSULATION TAPE WILDLIFE AND ASSET PROTECTION PRODUCTS

KEY FEATURES

- Compatible with all TE's Raychem MV insulation enhancement systems
- Easy to apply using readily available equipment
- Indoor and Outdoor use
- Anti-tracking properties
- Continues operating temperature up to 90°C
- Versatile and flexible at temperatures as low as -40°C.

TE Connectivity's (TE) Raychem high voltage busbar insulation tape (HVBT) is a heat-shrinkable, adhesive-coated tape which provides insulation enhancement and protection against accidentally induced flashover. TE's Raychem HVBT tape is designed to combine the integrity of a heat-shrinkable tubing with the versatility of a wraparound product.

HVBT tape is quick and easy to install. Upon application of heat the tape shrinks and the adhesive lining melts amalgamating the overlapping layers, to produce a complete lap to lap seal. A single layer of HVBT tape, two-thirds overlapped, will provide AC voltage withstand (flashover protection) to at least 17.5 kV increasing to 36 kV if a second layer is applied.

Although HVBT tape will adhere to itself and other insulating materials, it will not adhere to metal or porcelain, allowing easy removal for maintenance.

HVBT tape offers a simple and effective solution to the problems of retrofit insulation of busbars, particularly where existing equipment cannot be dismantled. It can be used for indoor and outdoor applications and is easily installed over a wide variety of shapes, including complex connections.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.

High Voltage Busbar Insulation Tape HVBT

TE's wildlife and asset protection products and systems of tubes, tapes, sheets, pre-formed covers and barriers provide a proven, cost-effective and easy-to-install solution to bird, animal and weather related outages.



PRODUCT PERFORMANCE		
Key Material Properties	Test Method	Required
Physical		
Resistance to Transformer Oil - Tensile Strength - Ultimate Elongation	VDE 0370	168 hrs. at 23°C, 10 MPa (1450 psi) min., 300% min
Water Absorption (24hrs at 23°C)	ASTM D570	0.2% max
Low Temperature Flexibility 4hrs at -40°C	ASTM D2671	No Cracking
Accelerated Ageing 168 hrs at 120°C Tensile Strength	ASTM D638	10MPa (1450 psi)
Accelerated Ageing 168 hrs at 120°C Ultimate Elongation	ASTM D638	300% min.
Electrical		
Dielectric Strength (2.0mm thickness)	ASTM D149	>130 kV/cm (330 V/mil)
Volume Resistivity	ASTM D257	1 x 10 ¹³ Ohm cm min.

Note: The above information refers to the backing material only.


ROUNDED BUSBARS			
Ratec Voltage (kV)	Phase-Phase (mm)	Phase-Ground (mm)	IEC 71-2 air clearance (mm)
12	30	40	120
17.5	45	60	160
24	60	90	220
36	100	160	320

RECTANGULAR BUSBARS			
Ratec Voltage (kV)	Phase-Phase (mm)	Phase-Ground (mm)	IEC 71-2 air clearance (mm)
12	35	45	120
17.5	55	65	160
24	70	100	220
36	140	190	320

PRODUCT PERFORMANCE		
Product Description	Rectangular Busbar Width: mm (inches)	Length of HVBT required per meter of Rectangular Busbar: M (yards)
HVBT-12-A(B20)	25 (1)	10 (11)
HVBT-14-A(B10)	50 (2)	7.6 (8.3)
HVBT-14-A(B10)	75 (3)	11.4 (12.5)
HVBT-14-A(B10)	100 (4)	15.6 (17)
HVBT-14-A(B10)	150 (6)	25 (27.3)
HVBT-16-A(B10)	200 (8)	15.6 (17)

PRODUCT PERFORMANCE		
Product Description	Round Busbar Diameter: mm (inches)	Length of HVBT required per meter of Round Busbar: M (yards)
HVBT-12-A(B20)	12 (0.5)	5 (5.5)
HVBT-14-A(B10)	25 (1)	5 (5.5)
HVBT-14-A(B10)	50 (2)	10 (11)
HVBT-14-A(B10)	75 (3)	16.7 (18.2)
HVBT-16-A(B10)	100 (4)	10 (11)

PRODUCT SELECTION					
Product Description	Dimensions				UOM: Roll of length, P (m)
	Q a min. (mm)	W1 a min. (mm)	W1 b min. (mm)	W2 b min. (mm)	
HVBT-12-A(B20)	25	0.38	0.56	0.86	10
HVBT-14-A(B10)	50	0.38	0.56	0.86	10
HVBT-16-A(B10)	100	0.38	0.56	0.86	10

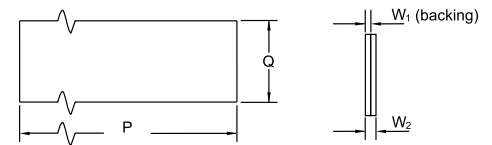

TECHNICAL REPORT	
EDR-5466	HVBT Product Qualification Report
EDR-5422	HVBT Material Qualification Report

INSTALLATION INSTRUCTIONS	
EPP-0619-8/98	Installation Instructions for High Voltage Busbar Tape (HVBT)

te.com/energy

© 2018 TE Connectivity. All Rights Reserved. EPP-2660-7/18-EN

Raychem, TE Connectivity and the TE connectivity (logo) are trademarks of the TE Connectivity Ltd. family of companies. Other logos, product and Company names mentioned herein may be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this brochure are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

FOR MORE INFORMATION: TE Technical Support Centers

USA:	+ 1 800 327 6996
Canada:	+ 1 (905) 475-6222
Mexico:	+ 52 (0) 55-1106-0800
Latin/S. America:	+ 54 (0) 11-4733-2200
France:	+ 33 380 583 200
UK:	+ 44 0870 870 7500
Germany:	+ 49 896 089 903
Spain:	+ 34 916 630 400
Italy:	+ 39 333 250 0915
Benelux:	+32 16 508 695
Russia:	+7 495-790 790 2-200
China:	+ 86 (0) 400-820-6015